


# FIVE STATION FLOOR MOUNTED SINK WITH TUBULAR LEGS

## **TOE-PUSH OPERATED**



Item #: \_\_\_\_\_ Qty #: \_\_\_\_\_ Model #: \_\_\_\_\_ Project #: \_\_\_\_\_

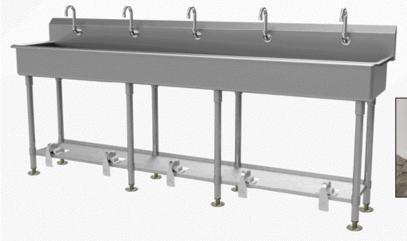





Foot Valves Included On All "FV" Models

### **FEATURES:**

8 1/2" high backsplash.

8" sink bowl depth.

Stainless steel "Z" brackets.

Two K-6 3 1/2" rear basket drains.

Tubular stainless steel legs with flanged feet.

One stainless steel support shelf with rear turn-up.

**Toe-Push Operated:** Includes five **K-104** toe-push valves and five **K-121** spouts.

#### **CONSTRUCTION:**

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish

#### **MATERIAL:**

All 14 gauge type "304" stainless steel. 1 5/8" tubular "304" stainless steel legs. Stainless steel gussets.

#### **MECHANICAL:**

Single faucet hole punched at each station.

		# of	# of		Cu.
Model #	Length	Spouts	Legs	Wt.	Ft.
FS-FM-100FV	100"	5	8	226 Lbs.	70



#### **MULTI-STATION ACCESSORIES & REPLACEMENT PARTS** Model **Description** QTY: **F** K-06 Splash Mount Faucet Mounting Kit K-121 Stainless Steel Soap Dispenser (Wall Mount Only) **K-13** K-104 Toe-Push Valve Assembly **K-104** Single Hole, Splash Mounted 3-1/2" Gooseneck Spout **K-121** K-411 Strainer Plate for 3-1/2" Drain **K-411 K-508** Special Sizing Charge (Larger Size Cut Down To Smaller Size) TA-19 Adjustable Stainless Steel Flanged Bullet Foot **TA-19**

Ships UPS

Standard Faucets conform to NSF 61 Standard 9 and compliance to AB 1953 Standards.

**MARNING:** Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:
Email: smartfab@advancetabco.com or Fax: 631-586-2933

TOL ± .500" ALL DIMENSIONS ARE TYPICAL

