


## HOSE ASSEMBLY with LOCK SLEEVES

**PART NUMBER:**  
7381553-201.0070A



### REMOVAL:

- Turn off the water supply and flush the toilet to empty the tank
- Remove the tank cover
- Open the cover on the battery compartment and disconnect the battery cable from the battery terminal
- Pull the locking collar off of the hose assembly using a twisting motion then remove the hose from the end of the actuator
- Repeat this step to remove the hose assembly from the flush tower
- Make sure the O-ring is reinstalled on the barb at the end of the actuator and on flush tower elbow (See Figure 1 and 2)

FIGURE 1


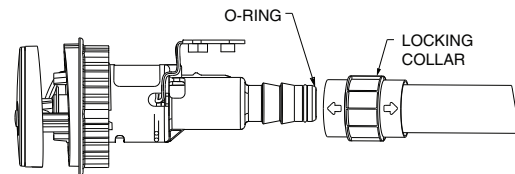


FIGURE 2



### RE-INSTALL:

- Remove the black rubber caps on both ends of the new hose assembly
- Slide the hose on the end of the actuator body covering 1 barb only
- Slide the locking collar over the hose and barb until both meet the end of the fitting
- Repeat these steps to attach the hose assembly to the flush tower
- Turn on the water supply
- Once refilled, flush the toilet to confirm accurate

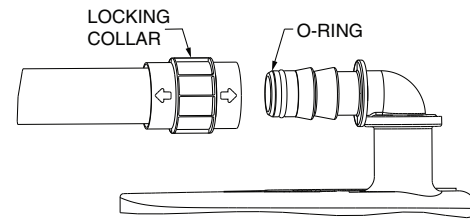