


- LG42-VRVB Finish(B)
- LG42-VRVBG Finish(BG)
- LG42-VRVC Finish(C)
- LG42-VRVD Finish(D)



Specifications

- Pforever Seal
- Push & Seal™ Pop-Up

Features

- 1.2 GPM Flow Rate
- Concealed Screw
- Ribbon Water Flow
- Metal Push & Seal™ Drain
- Mounting Hardware Included
- Optional Handles Available:
Order HHL-LG42VRVL* Separately
- Pfaster Connect™
- Supply Lines Not Included
- UltraSeal™ Ceramic Disc Valve
- Pforever Warranty®




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

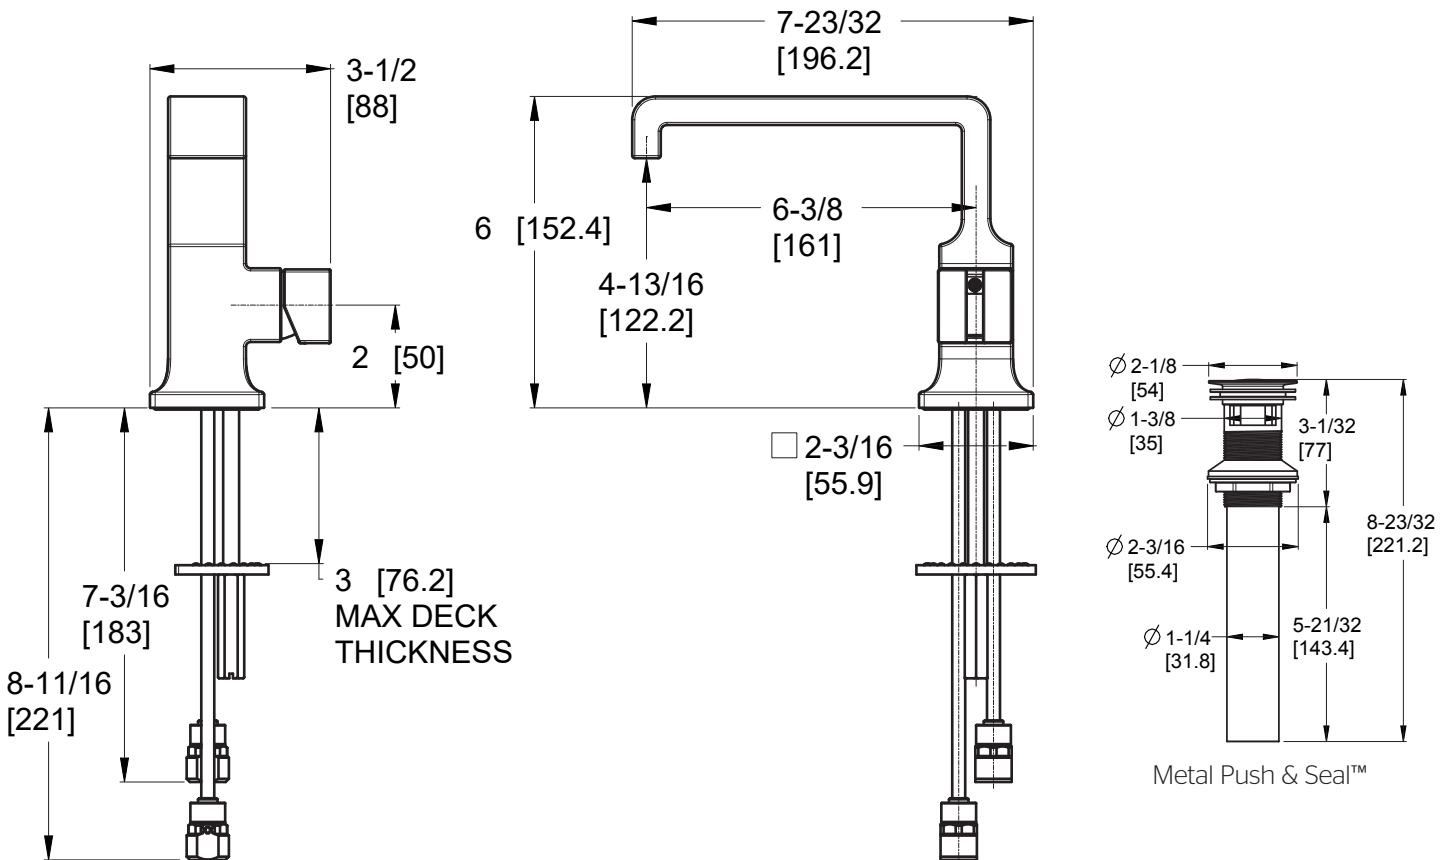

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings